

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 086 403 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
11.06.2003 Bulletin 2003/24

(51) Int Cl. 7: **G03F 7/038**

(21) Application number: **99917859.3**

(86) International application number:
PCT/EP99/02033

(22) Date of filing: **25.03.1999**

(87) International publication number:
WO 99/052017 (14.10.1999 Gazette 1999/41)

(54) **LIQUID, RADIATION-CURABLE COMPOSITION, ESPECIALLY FOR STEREOLITHOGRAPHY**
FLÜSSIGE, STRAHLENHÄRTBARE ZUSAMMENSETZUNG INSBESONDERE FÜR
STEREOLITHOGRAPHIE
COMPOSITION LIQUIDE DURCISSABLE PAR RADIATIONS, DESTINEE EN PARTICULIER A LA
STEREOLITHOGRAPHIE

(84) Designated Contracting States:
AT BE CH DE ES FI FR GB IT LI NL SE

(30) Priority: **06.04.1998 US 55832**

(43) Date of publication of application:
28.03.2001 Bulletin 2001/13

(60) Divisional application:
03075568.0

(73) Proprietor: **Vantico AG**
4057 Basel (CH)

(72) Inventors:
• **PANG, Thomas, Hsing**
Glendale CA 91201 (US)

- **MELISARIS, Anastasios, Panayiotis**
Willmington DE 19808 (US)
- **WANG, Ranyi**
Alhambra, CA 91803 (US)
- **FONG, John, Wai**
Los Angeles, CA 90041 (US)

(74) Representative:
Hedley, Nicholas James Matthew et al
Kilburn & Strode
20 Red Lion Street
London WC1R 4PJ (GB)

(56) References cited:
EP-A- 0 822 445 **EP-A- 0 831 127**
WO-A-97/42549 **DE-A- 4 344 125**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 086 403 B1

Description

[0001] The present invention relates to a liquid, radiation-curable composition which is particularly suitable for the production of three-dimensional shaped articles by means of stereolithography, to a process for the production of a cured product and, in particular, for the stereolithographic production of a three-dimensional shaped article from this composition having a high heat deflection temperature.

[0002] The production of three-dimensional articles of complex shape by means of stereolithography has been known for a relatively long time. In this technique the desired shaped article is built up from a liquid, radiation-curable composition with the aid of a recurring, alternating sequence of two steps (a) and (b); in step (a), a layer of the liquid, radiation-curable composition, one boundary of which is the surface of the composition, is cured with the aid of appropriate radiation, generally radiation produced by a preferably computer-controlled laser source, within a surface region which corresponds to the desired cross-sectional area of the shaped article to be formed, at the height of this layer, and in step (b) the cured layer is covered with a new layer of the liquid, radiation-curable composition, and the sequence of steps (a) and (b) is repeated until a so-called green model of the desired shape is finished. This green model is, in general, not yet fully cured and must therefore, normally, be subjected to post-curing.

[0003] The mechanical strength of the green model (modulus of elasticity, fracture strength), also referred to as green strength, constitutes an important property of the green model and is determined essentially by the nature of the stereolithographic-resin composition employed. Other important properties of a stereolithographic-resin composition include a high sensitivity for the radiation employed in the course of curing and a minimum curl factor, permitting high shape definition of the green model. In addition, for example, the precured material layers should be readily wettable by the liquid stereolithographic-resin composition, and of course not only the green model but also the ultimately cured shaped article should have optimum mechanical properties.

[0004] Another requirement that has recently become a high priority for stereolithography users is the high temperature performance of cured articles produced by stereolithography. It is usually measured by the Heat Deflection Temperature (HDT) or Glass Transition Temperature (T_g). The HDT value is determined by the ASTM method D648 applying a load of 66 psi.

[0005] For several years, high temperature performance for stereolithography produced articles has been achieved by the use of (meth)acrylate chemistry. This approach primarily entails the use of various commercially available urethane acrylate derivatives. EP-802455 of Teijin Seiki Corp. (October 22, 1997) and JP 08323866 of Takemoto Oil & Fat Co Ltd (December 10, 1996) describe acrylate urethane compositions for achieving good heat resistance and strength. However, a major disadvantage of such acrylate urethane compositions is that polymerization is hindered by atmospheric oxygen because polymerization is of a radical nature, that the cure shrinkage is unacceptably large, that the resins are irritant to the skin, particularly when the viscosity is low (low viscosity is highly preferred for stereolithography applications). Thus, acrylate urethane-based compositions show poor practicality for stereolithography.

[0006] Liquid, radiation-curable compositions for stereolithography which overcome the abovementioned problems of the acrylate chemistry are described, for example, in U.S. Pat. No. 5,476,748, which is incorporated herein by reference. These compositions are so-called hybrid systems, comprising free-radically and cationically photopolymerizable components. Such hybrid compositions comprise at least:

- (A) a liquid difunctional or more highly functional epoxy resin or a liquid mixture consisting of difunctional or more highly functional epoxy resins;
- (B) a cationic photoinitiator or a mixture of cationic photoinitiators;
- (C) a free-radical photoinitiator or a mixture of free-radical photoinitiators; and
- (D) at least one liquid poly(meth)acrylate having a (meth)acrylate functionality of more than 2,
- (E) at least one liquid cycloaliphatic or aromatic diacrylate, and
- (F) a certain hydroxy compound that is selected from the group consisting of OH-terminated polyethers, polyesters and polyurethanes. Such hybrid systems can optionally further contain vinyl ether-based resins or other cationically cured components such as oxetanes, spiro-ortho esters.

[0007] A drawback of commercial cationic or hybrid cationic-radical stereolithographic compositions is that their cured articles show HDT values that are much lower than those based on acrylate chemistry, usually between 40 and 100°C.

[0008] Many hybrid compositions have been developed by companies for use in stereolithography process systems. For example, U.S. Pat. No. 5,434,196, assigned on its face to Asahi Denka Kogyo K.K., discloses resin compositions for so-called optical molding containing a mixture of epoxy resins and vinyl ethers, a cationic initiator, and a mixture of an acrylate compound and a triacrylate compound.

[0009] To date, there is no scientifically published or universally accepted term for defining the high temperature hybrid stereolithography resins. Through marketing brochures of stereolithography resin manufacturers and presentations in trade organizations, high temperature hybrid stereolithography resins are defined as those wherein their cured

articles have HDT values over 80 and about 100°C. The highest HDT value ever reported for commercial hybrid stereolithography resins is about 100°C.

[0010] Despite all previous attempts, there exists a need for hybrid stereolithography compositions capable of producing high temperature performance cured articles for which the photospeed, accuracy, water resistance are commercially acceptable. Such hybrid compositions should possess HDT values over those of the existing ones, especially over 110°C.

[0011] The present invention relates to novel resin compositions comprising

a) 55-90% by weight of at least one solid or liquid actinic radiation-curable and cationically polymerizable organic substance, wherein component (a) comprises

a1) at least one glycidylether of a polyhydric aliphatic, alicyclic or aromatic alcohol having at least three epoxy groups with epoxy equivalent weight between 90 and 800 g/equivalent and

a2) at least one solid or liquid alicyclic epoxide with epoxy equivalent weight between 80 and 330 having at least two epoxy groups with a monomer purity of at least about 80% by weight, or mixtures thereof,

b) 0.05 to 12% by weight an actinic radiation-sensitive initiator for cationic polymerization;

c) 4 to 35% by weight of an actinic radiation-curable and radical-polymerizable organic substance, and

(d) 0.02 to 10% by weight an actinic radiation-sensitive initiator for radical polymerization, and

(e) optionally up to 40 % by weight of at least one solid or liquid cationic reactive modifier-flexibilizer, with the sum total of components (a) through (e) being 100 percent by weight.

[0012] The composition preferably contains 55-90%, more preferably 20 and 75% by weight, of the at least one solid or liquid actinic radiation-curable and cationically polymerizable organic substance.

[0013] The actinic radiation-curable and cationically polymerizable organic substance can contain not more than 20% by weight of at least one liquid or solid vinyl ether compound having at least two cationically-reactive groups in the molecule or a hydroxy-functionalized mono(poly)vinylether or mixtures thereof.

[0014] The actinic radiation-curable and cationically polymerizable organic substance can further contain at least one liquid or solid epoxy cresol novolac, epoxy phenol novolac, oxetane or spiro-ortho ester compound having at least two cationically-reactive groups in the molecule, or mixtures thereof.

[0015] The at least one glycidylether of a polyhydric aliphatic, alicyclic or aromatic alcohol having at least three epoxy groups is preferably between about 3 and 90%, more preferably 15% to 90% by weight of the at least one alicyclic epoxide having at least two epoxy groups.

[0016] A further embodiment of the invention is a novel resin composition comprising

a) 55-90% by weight of at least one solid or liquid actinic radiation-curable and cationically polymerizable organic substance, wherein component (a) comprises

a1) at least one glycidylether of a polyhydric aliphatic, alicyclic or aromatic alcohol having at least three epoxy groups with epoxy equivalent weight between 90 and 800 g/equivalent and

a3) at least one solid or liquid epoxy cresol novolac, or epoxy phenol novolac with epoxy equivalent weight between 130 and 350 having at least two functional groups, or mixtures thereof,

b) 0.05 to 12% by weight an actinic radiation-sensitive initiator for cationic polymerization;

c) 4 to 35% by weight of an actinic radiation-curable and radical-polymerizable organic substance, and

(d) 0.02 to 10% by weight an actinic radiation-sensitive initiator for radical polymerization, and

(e) optionally up to 40 % by weight of at least one solid or liquid cationic reactive modifier-flexibilizer with the sum total of components (a) through (e) being 100 percent by weight.

[0017] The composition preferably contains the at least one solid or liquid epoxy cresol novolac, epoxy phenol novolac having at least two functional groups, or mixtures thereof between 2 and 50% by weight. The at least one solid or liquid epoxy cresol novolac or epoxy phenol novolac more preferably has an epoxy functionality at least 3. The at least one solid or liquid epoxy cresol novolac or epoxy phenol novolac most preferably has an epoxy functionality at least 4.

[0018] The composition can further include not more than 20% by weight of at least one liquid or solid vinyl ether compound having at least two cationically-reactive groups the molecule, or a hydroxy-functionalized mono(poly)vinylether, or mixtures thereof.

[0019] The actinic radiation-curable and cationically polymerizable organic substance further comprises at least one liquid or solid alicyclic polyfunctional epoxide, oxetane or spiro-ortho ester compound having at least two cationically-

reactive groups in the molecule, or mixtures thereof.

[0020] The composition preferably contains the at least one glycidylether of a polyhydric aliphatic, alicyclic or aromatic alcohol having at least three epoxy groups at between 3 and 90%, more preferably at least 15% to 90% by weight of the at least one solid or liquid epoxy cresol novolac, epoxy phenol novolac having at least two functional groups.

[0021] The compositions can include as component (e) about 0.5 to about 40 percent by weight of at least one solid or liquid cationic reactive modifier-flexibilizer. The at least one solid or liquid cationic reactive modifier is preferably a reactive epoxy modifier or reactive vinyl ether modifier or a hydroxy-functionalized vinyl ether or mixtures thereof. More preferably, the reactive modifier-flexibilizer includes at least one cationically reactive bifunctional aliphatic, alicyclic or aromatic compound containing a chain extension segment connected to the cationic reactive group with a molecular weight of at least about 100 and not more than 2000.

[0022] The compositions can contain from about 4 to 35% by weight of a free radically curable component comprising at least 4% by weight one mono- or di(meth)acrylate and at least 4% by weight a poly(meth)acrylate having (meth)acrylate functionality greater than or equal to 3.

[0023] The present invention further relates to a method of producing a cured product, in which compositions described above are treated with actinic radiation. More preferably, the present invention relates to a method for producing three-dimensional shaped articles comprising:

a) treating a radiation-curable composition described above with actinic radiation to form an at least partially cured layer on the surface of said composition within a surface region corresponding to a desired cross-sectional area of the three-dimensional article to be formed, b) covering the at least partially cured layer produced in step a) with a new layer of said radiation-curable composition, and c) repeating steps a) and b) until an article having the desired shape is formed, and optionally, d) post-curing the resulting article.

[0024] The novel compositions herein contain, in the broadest sense, a mixture of at least one cationically curable compound and at least one photoinitiator for the cationically cured compound(s), and a selected free-radically curable component, wherein the composition preferably contains substantially no polyol or hydroxyl-group containing compounds. The compositions further optionally contain a free radical photoinitiator/sensitizer and a cationic reactive modifier.

[0025] The cationically curable liquid or solid compound may expeditiously be an aliphatic, alicyclic or aromatic polyglycidyl compound or cycloaliphatic polyepoxide or epoxy cresol novolac or epoxy phenol novolac compound and which on average possess more than one epoxide group (oxirane ring) in the molecule. Such resins may have an aliphatic, aromatic, cycloaliphatic, araliphatic or heterocyclic structure; they contain epoxide groups as side groups, or these groups form part of an alicyclic or heterocyclic ring system. Epoxy resins of these types are known in general terms and are commercially available.

[0026] Polyglycidyl esters and poly(β -methylglycidyl) esters are one example of suitable epoxy resins. Said polyglycidyl esters can be obtained by reacting a compound having at least two carboxyl groups in the molecule with epichlorohydrin or glycerol dichlorohydrin or β -methyl epichlorohydrin. The reaction is expediently carried out in the presence of bases. The compounds having at least two carboxyl groups in the molecule can in this case be, for example, aliphatic polycarboxylic acids, such as glutaric acid, adipic acid, pimelic acid, suberic acid, azelaic acid, sebacic acid or dimerized or trimerized linoleic acid. Likewise, however, it is also possible to employ cycloaliphatic polycarboxylic acids, for example tetrahydrophthalic acid, 4-methyltetrahydrophthalic acid, hexahydrophthalic acid or 4-methylhexahydrophthalic acid. It is also possible to use aromatic polycarboxylic acids such as, for example, phthalic acid, isophthalic acid, trimellitic acid or pyromellitic acid, or else carboxyl-terminated adducts, for example of trimellitic acid and polyols, for example glycerol or 2,2-bis(4-hydroxycyclohexyl)propane, can be used.

[0027] Polyglycidyl ethers or poly(β -methylglycidyl) ethers can likewise be used. Said polyglycidyl ethers can be obtained by reacting a compound having at least two free alcoholic hydroxyl groups and/or phenolic hydroxyl groups with a suitably substituted epichlorohydrin under alkaline conditions or in the presence of an acidic catalyst followed by alkali treatment. Ethers of this type are derived, for example, from acyclic alcohols, such as ethylene glycol, diethylene glycol and higher poly(oxyethylene) glycols, propane-1,2-diol, or poly(oxypropylene) glycols, propane-1,3-diol, butane-1,4-diol, poly(oxytetramethylene) glycols, pentane-1,5-diol, hexane-1,6-diol, hexane-2,4,6-triol, glycerol, 1,1,1-trimethylolpropane, bistrimethylolpropane, pentaerythritol, sorbitol, and from polyepichlorohydrins. Suitable glycidyl ethers can also be obtained, however, from cycloaliphatic alcohols, such as 1,3- or 1,4-dihydroxycyclohexane, bis(4-hydroxycyclohexyl)methane, 2,2-bis(4-hydroxycyclohexyl)propane or 1,1-bis(hydroxymethyl)cyclohex-3-ene, or they possess aromatic rings, such as N,N-bis(2-hydroxyethyl)aniline or p,p'-bis(2-hydroxyethylamino)diphenylmethane.

[0028] Particularly important representatives of polyglycidyl ethers or poly(β -methylglycidyl) ethers are based on phenols; either on monocyclic phenols, for example on resorcinol or hydroquinone, or on polycyclic phenols, for example on bis(4-hydroxyphenyl)methane (Bisphenol F), 2,2-bis(4-hydroxyphenyl)propane (Bisphenol A), or on condensation

products, obtained under acidic conditions, of phenols or cresols with formaldehyde, such as phenol novolaks and cresol novolaks. These compounds are particularly preferred as epoxy resins for the present invention, especially diglycidyl ethers based on Bisphenol A and Bisphenol F and mixtures thereof.

[0029] Poly(N-glycidyl) compounds are likewise suitable for the purposes of the present invention and are obtainable, for example, by dehydrochlorination of the reaction products of epichlorohydrin with amines containing at least two amine hydrogen atoms. These amines may, for example, be n-butylamine, aniline, toluidine, m-xylylenediamine, bis(4-aminophenyl)methane or bis(4-methylaminophenyl)methane. However, other examples of poly(N-glycidyl) compounds include N,N'-diglycidyl derivatives of cycloalkyleneureas, such as ethyleneurea or 1,3-propyleneurea, and N,N'-diglycidyl derivatives of hydantoins, such as of 5,5-dimethylhydantoin.

[0030] Poly(S-glycidyl) compounds are also suitable as the cationic curing resin herein, examples being di-S-glycidyl derivatives derived from dithiols, for example ethane-1,2-dithiol or bis(4-mercaptomethylphenyl) ether.

[0031] Examples of epoxide compounds in which the epoxide groups form part of an alicyclic or heterocyclic ring system include bis(2,3-epoxycyclopentyl) ether, 2,3-epoxycyclopentyl glycidyl ether, 1,2-bis(2,3-epoxycyclopentyl) ether, bis(4-hydroxycyclohexyl)methane diglycidyl ether, 2,2-bis(4-hydroxycyclohexyl)propane diglycidyl ether, 3,4-epoxycyclohexylmethyl 3,4-epoxycyclohexanecarboxylate, 3,4-epoxy-6-methyl-cyclohexylmethyl 3,4-epoxy-6-methylcyclohexanecarboxylate, di(3,4-epoxycyclohexylmethyl) hexanedioate, di(3,4-epoxy-6-methylcyclohexylmethyl) hexanedioate, ethylenebis(3,4-epoxycyclohexane-carboxylate, ethanediol di(3,4-epoxycyclohexylmethyl) ether, vinylcyclohexene dioxide, dicyclopentadiene diepoxide or 2-(3,4-epoxycyclohexyl-5,5-spiro-3,4-epoxy)cyclohexane-1,3-dioxane.

[0032] However, it is also possible to employ epoxy resins in which the 1,2-epoxide groups are attached to different heteroatoms or functional groups. Examples of these compounds include the N,N,O-triglycidyl derivative of 4-aminophenol, the glycidyl ether/glycidyl ester of salicylic acid, N-glycidyl-N'-(2-glycidylxypropyl)-5,5-dimethylhydantoin or 2-glycidylxy-1,3-bis(5,5-dimethyl-1-glycidylhydantoin-3-yl)propane.

[0033] Also conceivable is the use of liquid prereacted adducts of epoxy resins, such as those mentioned above, with hardeners for epoxy resins.

[0034] It is of course also possible to use liquid mixtures of liquid or solid epoxy resins in the novel compositions.

[0035] Examples of cationically polymerizable organic substances other than epoxy resin compounds include oxetane compounds, such as trimethylene oxide, 3,3-dimethyloxetane and 3,3-dichloromethyloxetane, 3-ethyl-3-phenoxy-methyloxetane, and bis(3-ethyl-3-methyloxy)butane; oxolane compounds, such as tetrahydrofuran and 2,3-dimethyltetrahydrofuran; cyclic acetal compounds, such as trioxane, 1,3-dioxalane and 1,3,6-trioxan cyclooctane; cyclic lactone compounds, such as β -propiolactone and ϵ -caprolactone; thiirane compounds, such as ethylene sulfide, 1,2-propylene sulfide and thioepichlorohydrin; thiotane compounds, such as 1,3-propylene sulfide and 3,3-dimethylthiothane.

[0036] Vinyl ethers that can be used in stereolithography compositions include ethyl vinyl ether, n-propyl vinyl ether, isopropyl vinyl ether, n-butyl vinyl ether, isobutyl vinyl ether, octadecyl vinyl ether, cyclohexyl vinyl ether, butanediol divinyl ether, cyclohexanedimethanol divinyl ether, diethyleneglycol divinyl ether, triethyleneglycol divinyl ether, tert-butyl vinyl ether, tert-amyl vinyl ether, ethylhexyl vinyl ether, dodecyl vinyl ether, ethyleneglycol divinyl ether, ethyleneglycolbutyl vinyl ether, hexanediol divinyl ether, triethyleneglycol methylvinyl ether, tetraethyleneglycol divinyl ether, trimethylolpropane trivinyl ether, aminopropyl vinyl ether, diethylaminoethyl vinyl ether, ethylene glycol divinyl ether, polyalkylene glycol divinyl ether, alkyl vinyl ether and 3,4-dihydropyran-2-methyl 3,4-dihydropyran-2-carboxylate. Commercial vinyl ethers include the Pluriol-E200 divinyl ether (PEG200-DVE), poly-THF290 divinyl ether (PTHF290-DVE) and polyethyleneglycol-520 methyl vinyl ether (MPEG500-VE) all of BASF Corp.

[0037] Hydroxy-functionalized mono(poly)vinylethers include polyalkyleneglycol monovinylethers, polyalkylene alcohol-terminated polyvinylethers, butanediol monovinyl ether, cyclohexanedimethanol monovinyl ether, ethyleneglycol monovinyl ether, hexanediol monovinyl ether, diethyleneglycol monovinyl ether.

[0038] Another highly important class of vinyl ethers that are suitable for stereolithography and may be used in the hybrid flexible stereolithography compositions are all those included in the U.S. Patent 5,506,087, which is incorporated herein by reference. More preferred are aromatic or alicyclic vinyl ethers. As an example, commercial vinyl ethers include Vectomer 4010, Vectomer 5015, Vectomer 4020, Vectomer 21010 and Vectomer 2020 of Allied Signal Corp., Morristown, NJ. Most preferred are Vectomer 4010 and Vectomer 5015.

[0039] Other cationically cured compounds include spiro ortho esters that are prepared by reacting epoxy compounds with lactone; ethylenically unsaturated compounds, such as vinylcyclohexane, n-vinyl-2-pyrrolidone and its various derivatives, isobutylene and polybutadiene, and derivatives of the above compounds.

[0040] The above cationically polymerizable compounds may be used alone or as a mixture of two or more thereof depending upon the desired performance.


[0041] Additional cationically curable commercial products that can be used herein include: Uvacure 1500, Uvacure 1501, Uvacure 1502, Uvacure 1530, Uvacure 1531, Uvacure 1532, Uvacure 1533, Uvacure 1534, Uvacure 1561, Uvacure 1562, all commercial products of UCB Radcure Corp., Smyrna, GA; UVR-6105, UVR-6100, UVR-6110, UVR-

6128, UVR-6200, UVR-6216 of Union Carbide Corp., Danbury, CT; the Araldite GY series that is Bisphenol A epoxy liquid resins, the Araldite CT and GT series that is Bisphenol A epoxy solid resins, the Araldite GY and PY series that is Bisphenol F epoxy liquids, the cycloaliphatic epoxides Araldite CY 179 and PY 284, the Araldite DY and RD reactive diluents series, the Araldite ECN series of epoxy cresol novolacs, the Araldite EPN series of epoxy phenol novolacs, all commercial products of Ciba Specialty Chemicals Corp., the Heloxy 48, Heloxy 44, Heloxy 84 and the other Heloxy product line, the EPON product line, all of Shell Corp., the DER series of flexible aliphatic and Bisphenol A liquid or solid epoxy resins, the DEN series of epoxy novolac resins, all commercial products of Dow Corp., Celoxide 2021, Celoxide 2021 P, Celoxide 2081, Celoxide 2083, Celoxide 2085, Celoxide 2000, Celoxide 3000, Glycidole, AOEX-24, Cyclomer A200, Cyclomer M-100, Epolead GT-300, Epolead GT-302, Epolead GT-400, Epolead 401, Epolead 403, (Daicel Chemical Industries Co., Ltd.), Epicoat 828, Epicoat 812, Epicoat 872, Epicoat CT 508, (Yuka Shell Co., Ltd.), KRM-2100, KRM-2110, KRM-2199, KRM-2400, KRM-2410, KRM-2408, KRM-2490, KRM-2200, KRM-2720, KRM-2750 (Asahi Denka Kogyo Co., Ltd.).

[0042] It is possible to employ a host of known and industrially tried and tested cationic photoinitiators for epoxy resins for purposes of practicing the instant invention. Examples of these photoinitiators are onium salts with anions of weak nucleophilicity. Examples thereof are halonium salts, iodosyl salts or sulfonium salts, sulfoxonium salts, or diazonium salts, as described for example in US-A-3,708,296. Other cationic photoinitiators are metallocene salts.

[0043] An overview of further commonplace onium salt initiators and/or metallocene salts is offered by "UV-Curing, Science and Technology", (Editor: S.P. Pappas, Technology Marketing Corp., 642 Westover Road, Stamford, Connecticut, USA) or "Chemistry & Technology of UV & EB Formulations for Coatings, Inks & Paints", Vol. 3 (edited by P. K. T. Oldring), which is incorporated herein by reference.

[0044] Preferred compositions comprise, as a cationic photoinitiator, a compound of the formula (B-I), (B-II) or (B-III)

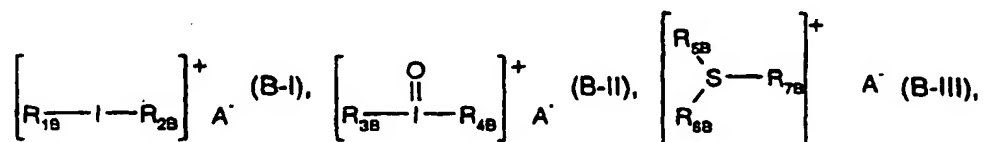

in which R_{1B} , R_{2B} , R_{3B} , R_{4B} , R_{5B} , R_{6B} , and R_{7B} independently of one another are C_6 - C_{18} aryl which is unsubstituted or substituted by appropriate radicals, and

A^- is $CF_3SO_3^-$ or an anion of the formula $[LQ_{mB}]^-$, where

L is boron, phosphorus, arsenic or antimony,


Q is a halogen atom, or some of the radicals Q in an anion LQ_m^- may also be hydroxyl groups, and

mB is an integer corresponding to the valency of L enlarged by 1.

[0045] Examples of C_6 - C_{18} aryl in this context are phenyl, naphthyl, anthryl and phenanthryl. In these substituents present for appropriate radicals are alkyl, preferably C_1 - C_6 alkyl, such as methyl, ethyl, n-propyl, isopropyl, n-butyl, sec-butyl, isobutyl, tert-butyl or the various pentyl or hexyl isomers, alkoxy, preferably C_1 - C_6 alkoxy, such as methoxy, ethoxy, propoxy, butoxy, pentoxy or hexoxy, alkylthio, preferably C_1 - C_6 alkylthio, such as methylthio, ethylthio, propylthio, butylthio, pentylthio or hexylthio, halogen, such as fluorine, chlorine, bromine or iodine, amino groups, cyano groups, nitro groups or arylthio, such as phenylthio. Examples of preferred halogen atoms Q are chlorine and, in particular, fluorine. Preferred anions LQ_{mB}^- are BF_4^- , PF_6^- , AsF_6^- , SbF_6^- and $SbF_5(OH)^-$.

[0046] Particularly preferred compositions are those comprising as a cationic photoinitiator a compound of the formula (B-III), in which R_{5B} , R_{6B} and R_{7B} are aryl, aryl being in particular phenyl or biphenyl or mixtures of these two groups.

[0047] Further preferred compositions are those comprising as a photoinitiator a compound of the formula (B-IV)



in which

- cB is 1 or 2,
 dB is 1, 2, 3, 4 or 5,
 X_B is a non-nucleophilic anion, especially PF₆⁻, AsF₆⁻, SbF₆⁻, CF₃SO₃⁻, C₂F₅SO₃⁻, n-C₃F₇SO₃⁻, n-C₄F₉SO₃⁻,
 n-C₆F₁₃SO₃⁻ and n-C₈F₁₇SO₃⁻,
 R_{8B} is a π-arene and
 R_{9B} is an anion of a π-arene, especially a cyclopentadienyl anion.

[0048] Examples of π-arenes as R_{8B} and anions of π-arenes as R_{9B} can be found in EP-A-0 094 915. Examples of preferred π-arenes as R_{8B} are toluene, xylene, ethylbenzene, cumene, methoxybenzene, methylnaphthalene, pyrene, perylene, stilbene, diphenylene oxide and diphenylene sulfide. Cumene, methylnaphthalene or stilbene are particularly preferred. Examples of non-nucleophilic anions X⁻ are FSO₃⁻, anions of organic sulfonic acids, of carboxylic acids or of anions LQ_{mB}⁻. Preferred anions are derived from partially fluoro- or perfluoro-aliphatic or partially fluoro- or perfluoro-aromatic carboxylic acids such as CF₃SO₃⁻, C₂F₅SO₃⁻, n-C₃F₇SO₃⁻, n-C₄F₉SO₃⁻, n-C₆F₁₃SO₃⁻, n-C₈F₁₇SO₃⁻, or in particular from partially fluoro- or perfluoro-aliphatic or partially fluoro- or perfluoro-aromatic organic sulfonic acids, for example from C₆F₅SO₃⁻, or preferably are anions LQ_{mB}⁻, such as BF₄⁻, PF₆⁻, AsF₆⁻, SbF₆⁻, and SbF₅(OH)⁻. Preference is given to PF₆⁻, AsF₆⁻, SbF₆⁻, CF₃SO₃⁻, C₂F₅SO₃⁻, n-C₃F₇SO₃⁻, n-C₄F₉SO₃⁻, n-C₆F₁₃SO₃⁻ and n-C₈F₁₇SO₃⁻.

[0049] The metallocene salts can also be employed in combination with oxidizing agents. Such combinations are described in EP-A-0 126 712.

[0050] In order to increase the light yield it is possible, depending on the type of initiator, also to employ sensitizers. Examples of these are polycyclic aromatic hydrocarbons or aromatic keto compounds. Specific examples of preferred sensitizers are mentioned in EP-A-0 153 904.

[0051] More preferred commercial cationic photoinitiators are UVI-6974, UVI-6970, UVI-6960, UVI-6990 (manufactured by Union Carbide Corp.), CD-1010, CD-1011, CD-1012 (manufactured by Sartomer Corp.), Adekaoptomer SP-150, SP-151, SP-170, SP-171 (manufactured by Asahi Denka Kogyo Co., Ltd.), Irgacure 261 (Ciba Specialty Chemicals Corp.), CI-2481, CI-2624, CI-2639, CI-2064 (Nippon Soda Co, Ltd.), DTS-102, DTS-103, NAT-103, NDS-103, TPS-103, MDS-103, MPI-103, BBI-103 (Midori Chemical Co, Ltd.). Most preferred are UVI-6974, CD-1010, UVI-6970, Adekaoptomer SP-170, SP-171, CD-1012, and MPI-103. The above-mentioned cationic photoinitiators can be used either individually or in combination of two or more.


[0052] It is possible to employ all types of photoinitiators which form free radicals given the appropriate irradiation.

Typical representatives of free-radical photoinitiators are benzoin, such as benzoin, benzoin ethers, such as benzoin methyl ether, benzoin ethyl ether and benzoin isopropyl ether, benzoin phenyl ether and benzoin acetate, acetophenones, such as acetophenone, 2,2-dimethoxy-acetophenone and 1,1-dichloroacetophenone, benzil, benzil ketals, such as benzil dimethylketal and benzil diethyl ketal, anthraquinones, such as 2-methylantraquinone, 2-ethylantraquinone, 2-tert-butylantraquinone, 1-chloroanthraquinone and 2-amylantraquinone, and also triphenylphosphine, benzoylphosphine oxides, for example 2,4,6-trimethylbenzoyl-diphenylphosphine oxide (Luzirin® TPO), bisacylphosphine oxides, benzophenones, such as benzophenone and 4,4'-bis(N,N'-dimethylamino)benzophenone, thioxanthenes and xanthenes, acridine derivatives, phenazine derivatives, quinoxaline derivatives or 1-phenyl-1,2-propanedione 2-O-benzoyl oxime, 1-aminophenyl ketones or 1-hydroxy phenyl ketones, such as 1-hydroxycyclohexyl phenyl ketone, phenyl 1-hydroxyisopropyl ketone and 4-isopropylphenyl 1-hydroxyisopropyl ketone, all of which constitute known compounds.

[0053] Particularly suitable free-radical photoinitiators which are used customarily in combination with a He/Cd laser as light source are acetophenones, such as 2,2-dialkoxybenzophenones and 1-hydroxy phenyl ketones, for example 1-hydroxycyclohexyl phenyl ketone or 2-hydroxyisopropyl phenyl ketone (=2-hydroxy-2,2-dimethylacetophenone), but especially 1-hydroxycyclohexyl phenyl ketone.

[0054] A class of photoinitiators that are commonly employed when using argon ion lasers comprises the benzil ketals, for example benzil dimethyl ketal. In particular, the photoinitiator used is an α-hydroxy phenyl ketone, benzil dimethyl ketal or 2,4,6-trimethylbenzoyldiphenylphosphine oxide.

[0055] A further class of suitable photoinitiators constitutes the ionic dye-counterion compounds, which are capable of absorbing actinic radiation and of generating free radicals which are able to initiate the polymerization of the acrylates. The novel compositions containing ionic dye-counterion compounds can in this way be cured more variably with visible light in an adjustable wavelength range of 400-700 nm. Ionic dye-counterion compounds and their mode of action are known, for example US Patent Nos. 4,751,102, 4,772,530 and 4,772,541. Examples of suitable ionic dye-counterion compounds are the anionic dye-iodonium ion complexes, the anionic dye-pyrylium ion complexes and, in particular, the cationic dye-borate anion compounds of the following formula:



in which D_c^+ is a cationic dye and R_{1c} , R_{2c} , R_{3c} and R_{4c} independently of one another are each an alkyl, aryl, alkaryl, allyl, aralkyl, alkenyl, alkynyl, an alicyclic or saturated or unsaturated heterocyclic group. Preferred definitions for the radicals R_{1c} to R_{4c} can be taken for example, from EP-A-0 223 587.

[0056] As photoinitiator, the novel compositions preferably include a 1-hydroxy phenyl ketone, especially 1-hydroxycyclohexyl phenyl ketone.

[0057] The free radical and cationic photoinitiators are added in effective quantities, i.e. in quantities from 0.1 to 12, particularly from 0.5 to 9 percent by weight, based on the overall quantity of the composition. If the novel compositions are used for stereolithographic processes, in which laser beams are normally employed, it is essential for the absorption capacity of the composition to be matched, by way of the type and concentration of the photoinitiators, in such a way that the depth of curing at normal laser rate is from approximately 0.1 to 2.5 mm.

[0058] The novel mixtures may also contain various photoinitiators of different sensitivity to radiation of emission lines with different wavelengths to obtain a better utilization of a UV/VIS light source which emits emission lines of different wavelengths. In this context it is advantageous for the various photoinitiators to be selected such, and employed in a concentration such, that equal optical absorption is produced with the emission lines used.

[0059] The free radically curable component preferably comprises at least one solid or liquid poly(meth)acrylate, for example, be di-, tri-, tetra- or pentafunctional monomeric or oligomeric aliphatic, cycloaliphatic or aromatic acrylates or methacrylates. The compounds preferably have a molecular weight of from 200 to 500.

[0060] Examples of suitable aliphatic poly(meth)acrylates having more than two unsaturated bonds in their molecules are the triacrylates and trimethacrylates of hexene-2,4,6-triol, glycerol or 1,1,1-trimethylolpropane, ethoxylated or propoxylated glycerol or 1,1,1-trimethylolpropane, and the hydroxyl-containing tri(meth)acrylates which are obtained by reacting triepoxide compounds, for example the triglycidyl ethers of said triols, with (meth)acrylic acid. It is also possible to use, for example, pentaerythritol tetraacrylate, bistrimethylolpropane tetraacrylate, pentaerythritol monohydroxytri-

acrylate or -methacrylate, or dipentaerythritol monohydroxypentaacrylate or -methacrylate.

[0061] It is additionally possible, for example, to use polyfunctional urethane acrylates or urethane methacrylates. These urethane (meth)acrylates are known to the person skilled in the art and can be prepared in a known manner by, for example, reacting a hydroxyl-terminated polyurethane with acrylic acid or methacrylic acid, or by reacting an isocyanate-terminated prepolymer with hydroxyalkyl (meth)acrylates to give the urethane (meth)acrylate.


[0062] Examples of suitable aromatic tri(meth)acrylates are the reaction products of triglycidyl ethers of trihydric phenols and phenol or cresol novolaks containing three hydroxyl groups, with (meth)acrylic acid.




[0063] The (meth)acrylates used herein are known compounds and some are commercially available, for example from the SARTOMER Company under product designations such as SR@295, SR@350, SR@351, SR@367, SR@399, SR@444, SR@454 or SR@9041.

[0064] Preferred compositions are those in which the free radically curable component contains a tri(meth)acrylate or a penta(meth)acrylate.

[0065] Suitable examples of di(meth)acrylates are the di(meth)acrylates of cycloaliphatic or aromatic diols such as 1,4-dihydroxymethylcyclohexane, 2,2-bis(4-hydroxycyclohexyl)propane, bis(4-hydroxycyclohexyl)methane, hydroquinone, 4,4'-dihydroxybiphenyl, Bisphenol A, Bisphenol F, bisphenol S, ethoxylated or propoxylated Bisphenol A, ethoxylated or propoxylated Bisphenol F or ethoxylated or propoxylated bisphenol S. Di(meth)acrylates of this kind are known and some are commercially available.


[0066] Other di(meth)acrylates which can be employed are compounds of the formulae (F-I), (F-II), (F-III) or (F-IV)

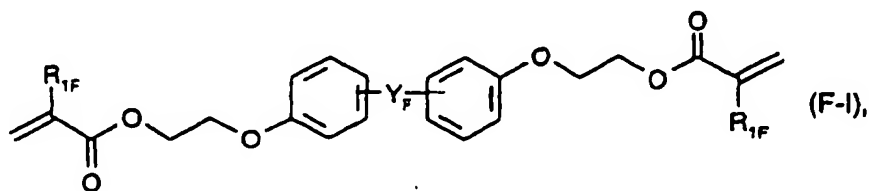

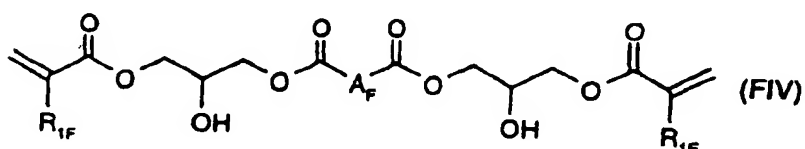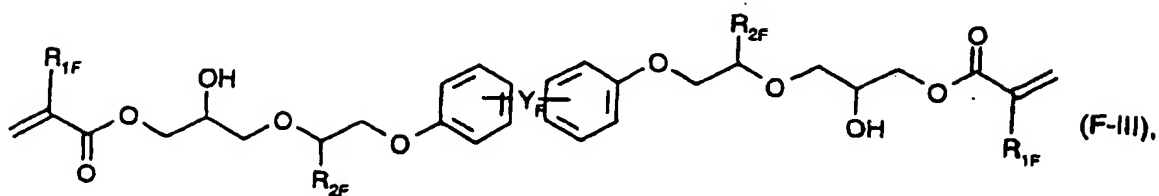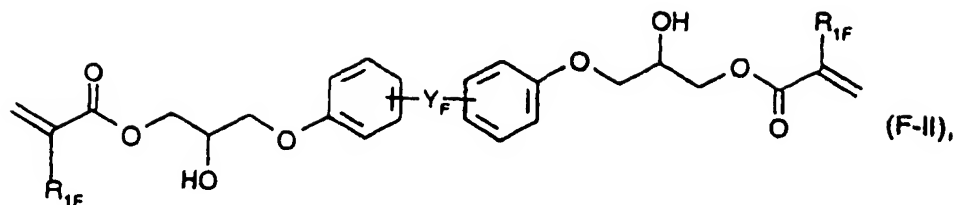





in which

- R_{1F} is a hydrogen atom or methyl,
 Y_F is a direct bond, C_1 - C_8 alkylene, $-S-$, $-O-$, $-SO-$, $-SO_2-$ or $-CO-$,
 R_{2F} is a C_1 - C_8 alkyl group, a phenyl group which is unsubstituted or substituted by one or more C_1 - C_4 alkyl groups, hydroxyl groups or halogen atoms, or is a radical of the formula $-CH_2-CR_{3F}$ in which
 R_{3F} is a C_1 - C_8 alkyl group or phenyl group, and
 A_F is a radical selected from the radicals of the formulae



[0067] Further examples of possible di(meth)acrylates are compounds of the formulae (F-V), (F-VI), (F-VII) and (F-VIII)

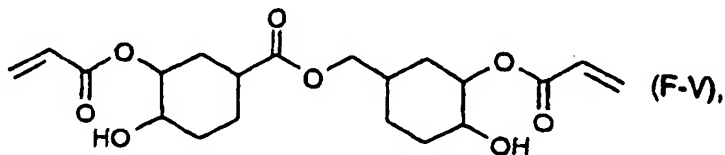

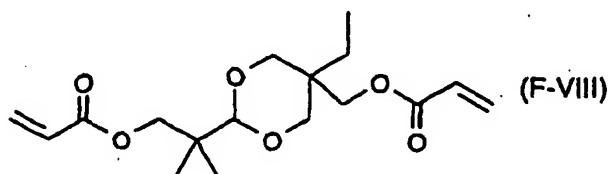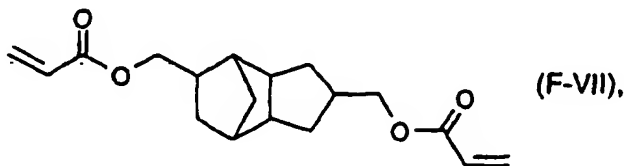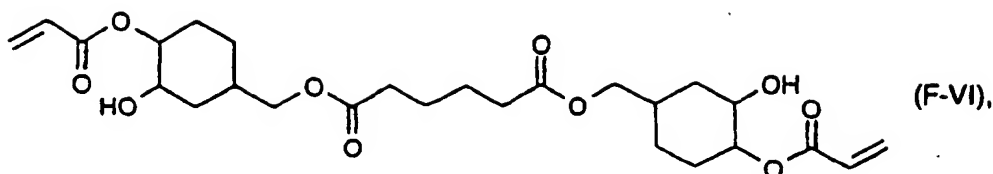

[0068] These compounds of the formulae (F-I) to (F-VIII) are known and some are commercially available. Their preparation is also described in EP-A-0 646 580.

[0069] Examples of commercially available products of these polyfunctional monomers are KAYARAD R-526, HDDA, NPGDA, TPGDA, MANDA, R-551, R-712, R-604, R-684, PET-30, GPO-303, TMPTA, THE-330, DPHA-2H, DPHA-2C, DPHA-21, D-310, D-330, DPCA-20, DPCA-30, DPCA-60, DPCA-120, DN-0075, DN-2475, T-1420, T-2020, T-2040, TPA-320, TPA-330, RP-1040, R-011, R-300, R-205 (Nippon Kayaku Co., Ltd.), Aronix M-210, M-220, M-233, M-240, M-215, M-305, M-309, M-310, M-315, M-325, M-400, M-6200, M-6400 (Toagosei Chemical Industry Co., Ltd.), Light acrylate BP-4EA, BP-4PA, BP-2EA, BP-2PA, DCP-A (Kyoisha Chemical Industry Co., Ltd.), New Frontier BPE-4, TEICA, BR-42M, GX-8345 (Daichi Kogyo Seiyaku Co., Ltd.), ASF-400 (Nippon Steel Chemical Co.), Ripoxy SP-1506, SP-1507, SP-1509, VR-77, SP-4010, SP-4060 (Showa Highpolymer Co., Ltd.), NK Ester A-BPE-4 (Shin-Nakamura Chemical Industry Co., Ltd.), SA-1002 (Mitsubishi Chemical Co., Ltd.), Viscoat-195, Viscoat-230, Viscoat-260, Viscoat-310, Viscoat-214HP, Viscoat-295, Viscoat-300, Viscoat-360, Viscoat-GPT, Viscoat-400, Viscoat-700, Viscoat-540, Viscoat-3000, Viscoat-3700 (Osaka Organic Chemical Industry Co., Ltd.).

[0070] According to the present invention, it is preferable that the radiation-curable and cationically polymerizable organic component (a) comprise at least one component (a1) that is a polyfunctional aliphatic, alicyclic or aromatic glycidylether(s) having at least three epoxy groups per molecule. Component (a1) has been found to 1) substantially increase the high temperature performance of the cured article, 2) improve the wet recoatability of the liquid composition and 3) improve the side wall finish of the cured article. More preferred compositions contain component (a1) that is a polyfunctional aliphatic, alicyclic or aromatic glycidylether, or mixtures thereof having at least three epoxy groups per molecule with an epoxy equivalent weight (EEW) between 90 and 800. Most preferred are those having an EEW weight between 90 and 650. The triglycidylether of trimethylolpropane, Heloxy 48 of Shell Corp., having an EEW of about 140-160 is one of the most preferred polyglycidylether compounds. The polyfunctional glycidylether(s) having at least three epoxy groups in their molecule preferably comprises between about 2 and 90% by weight the overall cationic component (a), more preferably, between about 9 and about 60% by weight, most preferably between 10 and 50% by weight.

[0071] According to the present invention, it is preferable that the radiation-curable and cationically polymerizable organic component (a) comprise at least one component (a2) that is an alicyclic polyepoxide having at least two epoxy groups per molecule. Component (a2) has been found to be effective at increasing the high temperature performance of cured articles when it is in a very pure form, which means elimination of its dimers or trimers at the highest possible

extent. More preferred compositions contain component (a2) with a monomer purity of over about 80% and epoxy equivalent weight between 80 and 330, more preferably between 90 and 300. Most preferred compositions contain component (a2) in a pure form having epoxy equivalent weight between 100 and 280 wherein dimers or trimers or oligomers are substantially eliminated. Commercial products having over about 90% monomer purity to greater than about 94% monomer purity are most preferred. For example, 3,4-epoxycyclohexylmethyl 3',4'-epoxycyclohexanecarboxylate (ECEC) having an epoxy equivalent weight between 130 and 145 with varying degrees of monomer purity can be purchased through various commercial sources. More preferred is Araldite CY179 of Ciba Speciality Chemicals containing a limited percentage of dimers or oligomers, such that the monomer purity is about 90%. Most preferred is UVR6105 of Union Carbide Corp., which contains a smaller percentage of oligomers than Araldite CY 179. The most preferred is Uvacure 1500 of UCB Radcure Corp., which is the purest ECEC known by the inventors. Table 1 in the example demonstrate that the high monomer purity of Uvacure 1500 produces a cured article having an unusually high thermal performance. Even a small percentage by weight of dimers or trimers in a cycloaliphatic epoxide, component (a2), can drastically reduce the HDT value of the cured article. Preferred compositions contain component (a2) at between 5 to 80 % by weight. More preferred compositions contain component (a2) at between 10 and 75% by weight. Most preferred compositions contain component (a2) at between 15 to 70% by weight.

[0072] According to the present invention, it is preferable that the radiation-curable and cationically polymerizable organic component (a) comprise at least one component (a3) that is a solid or liquid epoxycresol novolac or epoxyphenol novolac having at least two epoxy groups per molecule. Component (a3) has been found to be very effective at increasing the high temperature performance of cured articles when its epoxy functionality becomes higher than 2. The epoxy equivalent weight of component (a3) is between 130 to 350g/eq. More preferred compositions contain component (a3) that is epoxycresol novolac or epoxyphenol novolacs having an epoxy functionality at least about 3. Most preferred are those with epoxy functionality over about 4 to greater than about 5. For example, epoxycresol novolac ECN1299 has an epoxy equivalent weight number between 217 and 244 with an epoxy functionality of about 5.4 (product of Ciba Speciality Chemicals) and produces a cured article having high temperature performance. Preferred amounts for component (a3) is between 3 and 80% by weight. More preferred amount is between 8 to 75% by weight. The most preferred amount is between 10 to 55% by weight.

[0073] Component (a) optionally preferably includes vinyl-ether group containing compounds. Preferred examples are aliphatic polyalkoxy di(poly)vinylethers, polyalkylene di(poly)vinylethers and hydroxy-functionalized mono(poly)vinylethers. More preferred vinylethers are those having aromatic or alicyclic moieties in their molecules. Preferred amounts of the vinylether component is between 0.5 to 20% by weight. More preferred amounts is between 2 to 17% by weight. Most preferred amounts is between 3 to 14 by weight.

[0074] According to the present invention, it is preferable that radiation curable and radically polymerizable organic component (c) be contained in amounts of 4 to 35% by weight. More referred compositions contain component (c) between 7 to 30% by weight. Most preferred are compositions containing component (c) between 8 to 20% by weight. Most preferred compositions also contain 4 to 10% by weight of at least one liquid or solid poly(meth)acrylate having a (meth)acrylate functionality greater than or equal to 3, and from 4 to 10% by weight of one or more di(meth)acrylates.

[0075] Preferred compositions contain component (b) that is a cationic photoinitiator or a mixture of cationic photoinitiators between 0.05 to 12% by weight. More preferred compositions contain component (b) between 0.1 to 11% by weight. Most preferred compositions contain component (b) between 0.15 to 10% by weight.

[0076] It is preferred for component (d) that is a free-radical photoinitiator or a mixture of free-radical photoinitiators to be contained between 0.1 to 10% by weight. More preferred compositions contain component (d) between 0.3 to 8% by weight. Most preferred compositions contain component (d) between 0.4 to 7% by weight.

[0077] Preferred, more preferred and most preferred compositions may contain between 0 to 10% by weight of additives or reactive diluents.

[0078] To impart flexibility and impact resistance, the novel compositions herein optionally further include a cationic reactive modifier (epoxy-, vinylether-, spiro-orthoester- or oxetane-based). The cationic reactive modifier component imparts flexibility and impact resistance to the cured article without compromising photospeed, or accuracy of the liquid composition or water resistance for the cured article. The selected cationic reactive modifiers should be at least bi-functional compounds, more preferably aliphatic, alicyclic and/or aromatic compounds having, on average, at least two cationically reactive groups per molecule containing at least one chain extension segment with a molecular weight of at least about 100 and not more than 2000. Each chain extension segment is an organic or inorganic chain that connects the epoxide rings or vinylether groups or other cationically reactive groups with the core or backbone of the main molecule. The equivalent weight per epoxide can vary between about 180 and about 2000. The equivalent weight per vinylether group or any other cationically cured group can vary between about 100 and 1600.

[0079] Cationic reactive modifiers having more than two cationically reactive groups and a corresponding number of chain extension segments are preferred. Preferred chain extension segments are unsubstituted aliphatic or aliphatic substituted with C₁-C₁₀ alkyl or C₁-C₁₀ alkoxy groups, unsubstituted alkylene or substituted with C₁-C₁₀alkyl or C₁-C₁₀alkoxy alkylene groups, unsubstituted cycloaliphatic or substituted cycloaliphatic with C₁-C₁₀ alkyl or C₁-C₁₀

10

19

30

38



15

56

22

18

about 60% by weight, more preferably about 2% to about 50% by weight, most preferably about 2% to 30 by weight. The solid or liquid reactive cationically modifiers may be used singly or as a mixture.

[0087] The compositions described above can further include customary additives for stereolithographic compositions, such as coloring agents, such as pigments and dyes, antifoaming agents, leveling agents, thickening agents, flame retardant and antioxidants.

[0088] In a particularly preferred embodiment, the hybrid cationically and radically cured composition does not contain any polyol or hydroxyl group-containing compounds. It has been widely accepted that hydroxyl group-containing compounds are a required component for epoxy hybrid compositions used in stereolithography. It is believed that epoxy formulations do not cure and postcure to high extent unless the composition contains a certain percentage of a diol, triol or polyol. This belief is based on the understanding that the hydroxyl groups react with the epoxy groups during the epoxy ring opening, and contribute to the formation of a dense three dimensional network. A recent application WO 97/38354 (16 October, 1997) to DSM Corp., Japan Synthetic Rubber Co., Ltd., Japan Fine Coatings Co., Ltd. teaches that a diol or triol or polyol component is necessary to be present in a hybrid liquid composition at a concentration above a critical one in order the cured articles to possess good properties. The same patent teaches that "if the proportion of the polyol component is too low, the aim of developing the photo-curing characteristic can not be achieved and these are cases where a three-dimensional object with sufficient stability in shape and properties can not be produced from the resin composition". Applicants, however, herein have been able to obtain highly crosslinked networks by photopolymerizing hybrid epoxy compositions with no diol or triol or polyol having high heat deflection temperature values, in excess 110°C.

[0089] If necessary, the resin composition for stereolithography applications according to the present invention may contain other materials in suitable amounts, as far as the effect of the present invention is not adversely affected. Examples of such materials include radical-polymerizable organic substances other than the aforementioned cationically polymerizable organic substances; heat-sensitive polymerization initiators; various additives for resins such as coloring agents such as pigments and dyes, antifoaming agents, leveling agents, thickening agents, flame retardant and antioxidant; fillers such as silica, alumina, glass powder, ceramic powder, metal powder and modifier resins. Particular examples of the radical-polymerizable organic substances include but not limited to compounds that thermally polymerize, while those of the heat-sensitive polymerization initiator includes aliphatic onium salts disclosed in Japanese Patent Laid-Open Nos. 49613/1982 and 37004/1983.

[0090] The filler to be used in the present invention is a reactive or non-reactive, inorganic or organic, powdery, fibrous or flaky material. The filler material can be organic or inorganic. Examples of organic filler materials are polymeric compounds, thermoplastics, core-shell, aramid, kevlar, nylon, crosslinked polystyrene, crosslinked poly(methyl methacrylate), polystyrene or polypropylene, crosslinked polyethylene powder, crosslinked phenolic resin powder, crosslinked urea resin powder, crosslinked melamine resin powder, crosslinked polyester resin powder and crosslinked epoxy resin powder. Examples of inorganic fillers are mica, glass or silica beads, calcium carbonate, barium sulfate, talc, glass or silica bubbles, zirconium silicate, iron oxides, glass fiber, asbestos, diatomaceous earth, dolomite, powdered metals, titanium oxides, pulp powder, kaoline, modified kaolin, hydrated kaolin metallic fillers, ceramics and composites. Mixtures of organic and/or inorganic fillers can be used.

[0091] Further examples of preferred fillers are micro crystalline silica, crystalline silica, amorphous silica, alkali alumino silicate, feldspar, woolastonite, alumina, aluminum hydroxide, glass powder, alumina trihydrate, surface treated alumina trihydrate, alumina silicate. Each of the preferred fillers is commercially available. The most preferred filler materials are inorganic fillers, such as mica, Imsil, Novasite, amorphous silica, feldspar, and alumina trihydrate. It has transparency to UV light, low tendency to refract or reflect incident light and it provides good dimensional stability and heat resistance.

[0092] The filler to be used for the resin composition for stereolithography according to the present invention must satisfy requirements that it hinders neither cationic nor radical polymerizations and the filled SL composition has a relatively low viscosity suitable for the stereolithography process. These fillers may be used alone or as a mixture of two or more of them depending upon the desired performance. The fillers used in the present invention may be neutral acidic or basic. The filler particle size may vary depending on the application and the desired resin characteristics. It may vary between 50 nanometers and 50 micrometers.

[0093] The filler material can optionally be surfaced treated with various compounds-coupling agents. Examples include methacryloxy propyl trimethoxy silane, beta-(3,4-epoxycyclohexyl)ethyl trimethoxy silane, gamma-glycidoxo propyl trimethoxy silane and methyl triethoxy silane. The most preferred coupling agents are commercially available from Osi Chemicals Corp. and other chemical suppliers.

[0094] The filler loading is preferably from about 0.5 to about 90%, more preferably from about 5 to about 75%, most preferably from about 5 to about 60% by weight with respect to the total weight of the filled resin composition.

[0095] The novel compositions can be prepared in a known manner by, for example, premixing individual components and then mixing these premixes, or by mixing all of the components using customary devices, such as stirred vessels, in the absence of light and, if desired, at slightly elevated temperature.

[0096] The novel compositions can be polymerized by irradiation with actinic light, for example by means of electron beams, X-rays, UV or VIS light, preferably with radiation in the wavelength range of 280-650 nm. Particularly suitable are laser beams of HeCd, argon or nitrogen and also metal vapour and NdYAG lasers. This invention is extended throughout the various types of lasers existing or under development that are to be used for the stereolithography process, e.g. solid state, argon ion lasers, etc. The person skilled in the art is aware that it is necessary, for each chosen light source, to select the appropriate photoinitiator and, if appropriate, to carry out sensitization. It has been recognized that the depth of penetration of the radiation into the composition to be polymerized, and also the operating rate, are directly proportional to the absorption coefficient and to the concentration of the photoinitiator. In stereolithography it is preferred to employ those photoinitiators which give rise to the highest number of forming free radicals or cationic particles and which enable the greatest depth of penetration of the radiation into the compositions which are to be polymerized.

The invention additionally relates to a method of producing a cured product, in which compositions as described above are treated with actinic radiation. For example, it is possible in this context to use the novel compositions as adhesives, as coating compositions, as photoresists, for example as solder resists, or for rapid prototyping, but especially for stereolithography. When the novel mixtures are employed as coating compositions, the resulting coatings on wood, paper, metal, ceramic or other surfaces are clear and hard. The coating thickness may vary greatly and can for instance be from 0.01 mm to about 1 mm. Using the novel mixtures it is possible to produce relief images for printed circuits or printing plates directly by irradiation of the mixtures, for example by means of a computer-controlled laser beam of appropriate wavelength or employing a photomask and an appropriate light source.

[0097] One specific embodiment of the abovementioned method is a process for the stereolithographic production of a three-dimensional shaped article, in which the article is built up from a novel composition with the aid of a repeating, alternating sequence of steps (a) and (b); in step (a), a layer of the composition, one boundary of which is the surface of the composition, is cured with the aid of appropriate radiation within a surface region which corresponds to the desired cross-sectional area of the three-dimensional article to be formed, at the height of this layer, and in step (b) the freshly cured layer is covered with a new layer of the liquid, radiation-curable composition, this sequence of steps (a) and (b) being repeated until an article having the desired shape is formed. In this process, the radiation source used is preferably a laser beam, which with particular preference is computer-controlled.

[0098] In general, the above-described initial radiation curing, in the course of which the so-called green models are obtained which do not as yet exhibit adequate strength, is followed then by the final curing of the shaped articles by heating and/or further irradiation.

[0099] The term "liquid" in this application is to be equated with "liquid at room temperature" in the absence of any statement to the contrary, room temperature being understood as being, in general, a temperature between 5° and 45°C, preferably between 15° and 30°C.

Examples Background:

[0100] Representative embodiments of the present invention will be described as examples, though the present invention by no means is limited by them. In the following examples, all parts are by weight. The formulations indicated in the examples are prepared by mixing the components, with a stirrer at 20 to 80°C (depending on viscosity) until a homogeneous composition is obtained. Most formulations can be stirred to a homogenous composition at room temperatures of about 25 to 30°C.

[0101] The physical data relating to the formulations are obtained as follows: The viscosity of the liquid mixture is determined at 30°C using a Brookfield viscometer. The mechanical properties of the formulations are determined on three-dimensional specimens produced with the aid of an He/Cd or Ar/UV laser. In particular, the window panes (for measuring photospeed) and the HDT specimens were built in a 3D Systems SL 350 stereolithography machine using a solid state laser emitting at 355 nm. The HDT specimens were UV postcured in a 3D PCA apparatus for 90 minutes and subsequently thermally postcured at 160°C for 2 hours. The HDT value was measured based on the ASTM method D648 under maximum fiber stress of 66 psi.

[0102] The photosensitivity of the formulations is determined on so-called window panes. In this determination, single-layer test specimens are produced using different laser energies, and the layer thicknesses obtained are measured. The plotting of the resulting layer thickness on a graph against the logarithm of the irradiation energy used gives a "working curve". The slope of this curve is termed D_p (given in mm or mils). The energy value at which the curve passes through the x-axis is termed E_c (and is the energy at which gelling of the material still just takes place; cf. P. Jacobs, Rapid Prototyping and Manufacturing, Soc. of Manufacturing Engineers, 1992, p. 270 ff.).

[0103] The raw materials used for liquid SL compositions of Table 1 were:

Trimethylolpropane triglycidylether (Heloxyl 48) and 4,4'-cyclohexanedimethanol diglycidylether (Heloxyl 107) are commercial products of Shell Corp., Houston, TX. 1,4-Butanediol diglycidylether (Araldite DY026), cresol epoxy

novolac (ECN1299), epoxy phenol novolac (EPN 9880CH), 3,4-epoxycyclohexylmethyl 3',4'-epoxycyclohexanecarboxylate (Araldite CY179), and radical photoinitiator 1-hydroxycyclohexyl phenyl ketone (Irgacure 184), are all commercial products of Ciba Specialty Chemicals Corp., Tarrytown, NY.

3,4-epoxycyclohexylmethyl 3',4'-epoxycyclohexanecarboxylate (UVAcure 1500), is a distilled cycloaliphatic diepoxide, and the Bisphenol A diglycidylether diacrylate (Ebecryl 3700) are commercial products of UCB Radcure, Smyrna, GA.

Dipentaerythritol monohydroxypentaacrylate (SR 399) and the cationic photoinitiator CD1010 are commercial products of Sartomer Corp, Exton, PA.

Caprolactone polyester-polyol Tone 0301 is a commercial product of Union Carbide, Danbury, CT.

Example 1.

[0104]

TABLE 1.

| Liquid Stereolithography Compositions. | | | | | | | | |
|--|-------|-------|-------|-------|-------|-------|-------|-------|
| Formula # | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Heloxy 48 | 15.0 | 30.0 | | | 30.0 | 10.0 | 10.0 | 30.0 |
| Heloxy 107 | | | 30.0 | | | 12.5 | 12.5 | |
| DY 026 | | | | 30.0 | | 20.0 | 20.0 | |
| ECN 1299 | | | | | | 38.2 | | |
| EPN 9880 CH | | | | | | | 38.2 | |
| UVAcure 1500 | 65.2 | 50.2 | 50.2 | 50.2 | | | | 50.2 |
| CY 179 | | | | | 50.2 | | | |
| vectomer 4010 | | | | | | | | 8.0 |
| N3700 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 |
| SR399 | 6.0 | 6.0 | 6.0 | 6.0 | 6.0 | 6.0 | 6.0 | 6.0 |
| | | | | | | | | |
| I-184 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 |
| CD 1010 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 4.5 | 4.5 | 5.0 |
| Total Weight | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 108.0 |
| D _p (mils) | 5.46 | 5.48 | 5.57 | 5.26 | 5.59 | 4.86 | 4.84 | 5.39 |
| E _c (mJ/cm ²) | 8.85 | 8.54 | 7.39 | 6.75 | 10.05 | 14.38 | 21.35 | 6.06 |
| | | | | | | | | |
| HDT, 2h at 160°C | 215 | 254 | 129 | 130 | 141 | 240 | 110 | 208 |

[0105] Compositions 1 and 2 produce cured articles having excellent heat deflection temperature values due to the presence of Uvacure 1500, a purified cycloaliphatic epoxide with epoxy equivalent weight between 130 and 145, in conjunction with Heloxy 48, a polyglycidylether component having at least three epoxy groups and epoxy equivalent weight between 140 and 160. Composition 3 shows a drop of about 125°C of the HDT value compared to that of composition 2. This trend was attributed to the replacement of Heloxy 48 of composition 2 with Heloxy 107, a difunctional glycidylether in composition 3; note that Heloxy 48 and Heloxy 107 have very similar epoxy equivalent weight, and are contained at the same percentage by weight. A similar trend was observed in composition 4 where introduction of the Araldite DY 026, a difunctional aliphatic epoxide with epoxy equivalent weight of between 120-135 instead of Heloxy 48 (as in composition 2) may be responsible for lowering the HDT value to about 130°C. Composition 5 is similar to composition 2 except that Uvacure 1500 has been replaced with Araldite CY 179. Araldite CY179 is an alicyclic epoxide having substantially the same chemical structure as UVAcure1500. Without being bound by any theories, the lower HDT value of composition 5 relative to composition 2 may be attributed to the fact that CY179 has a lower monomer

purity than UVAcure 1500. Composition 6 produces excellent heat deflection temperature value due to the incorporation of ECN 1299 (epoxy cresol novolac), which has a very high number of reactive functionality (approximately 5.4). Composition 7 containing an epoxy phenol novolac shows HDT value that is higher than the commercially available hybrid stereolithography resins having HDT values between 80 and 100°C. Replacement of the EPN9880CH component (epoxy functionality of 3.6) with another epoxy phenol novolac having epoxy functionality over 4 would yield a cured article with much higher HDT value than composition 7. Composition 8 shows that incorporation of a vinylether, Vec-tomer 4010, improves the photospeed of the liquid composition while maintaining high thermal resistance.

[0106] The above-mentioned scientific comments on SL liquid compositions of Table 1 were provided in an attempt to follow the trend of thermal properties based on individual components. Our intention was neither to distinguish amongst good or bad SL liquid compositions nor to be bound by any theories. In addition to high HDT values, the compositions shown above exhibit high photospeed, good wet-recoat-ability properties, high water resistance and good side wall finish.

Claims

1. A liquid resin composition comprising

a) 55-90% by weight of at least one solid or liquid actinic radiation-curable and cationically polymerizable organic substance, wherein component (a) comprises

a1) at least one glycidylether of a polyhydric aliphatic, alicyclic or aromatic alcohol having at least three epoxy groups with epoxy equivalent weight between 90 and 800 g/equivalent and a2) at least one solid or liquid alicyclic epoxide with epoxy equivalent weight between 80 and 330 having at least two epoxy groups with a monomer purity of at least about 80% by weight, or mixtures thereof,

b) 0.05 to 12% by weight of an actinic radiation-sensitive initiator for cationic polymerization;

c) 4 to 35% by weight of an actinic radiation-curable and radical-polymerizable organic substance,

(d) 0.02 to 10% by weight an actinic radiation-sensitive initiator for radical polymerization, and

(e) optionally up to 40 % by weight of at least one solid or liquid cationic reactive modifier-flexibilizer with the sum total of components (a) through (e) being 100 percent by weight.

2. A composition according to claim 1 wherein component (a) comprises between 20 and 75% by weight.

3. A composition according to claims 1 to 2 wherein component (a) further comprises not more than 20% by weight of at least one liquid or solid vinylether compound having at least two cationically-reactive groups in the molecule or a hydroxy-functionalized mono(poly)vinylether or mixtures thereof.

4. A composition according to claims 1 to 3 wherein component (a) further comprises at least one liquid or solid epoxy cresol novolac, epoxy phenol novolac, oxetane or spiro-ortho ester compound having at least two cationically-reactive groups in the molecule, or mixtures thereof.

5. A composition according to claims 1 to 4 wherein component a1) is between 3 and 90%, preferably at least 15% by weight of component a2).

6. A liquid resin composition comprising

a) 55-90% by weight of at least one solid or liquid actinic radiation-curable and cationically polymerizable organic substance, wherein component (a) comprises

a1) at least one glycidylether of a polyhydric aliphatic, alicyclic or aromatic alcohol having at least three epoxy groups with epoxy equivalent weight between 90 and 800 g/equivalent and a3) at least one solid or liquid epoxy cresol novolac, or epoxy phenol novolac with epoxy equivalent weight between 130 and 350 having at least two functional groups, or mixtures thereof,

b) 0.05 to 12% by weight an actinic radiation-sensitive initiator for cationic polymerization;

c) 4 to 35% by weight of an actinic radiation-curable and radical-polymerizable organic substance,

(d) 0.02 to 10% by weight an actinic radiation-sensitive initiator for radical polymerization, and

(e) optionally up to 40 % by weight of at least one solid or liquid cationic reactive modifier-flexibilizer with the sum total of components (a) through (e) being 100 percent by weight.

7. A composition according to claim 6 wherein component (a) comprises component a3) between 2 and 50% by weight.
8. A composition according to claims 6 to 7 wherein component (a) further comprises not more than 20% by weight of at least one liquid or solid vinyl ether compound having at least two cationically-reactive groups in the molecule, or a hydroxy-functionalized mono(poly)vinyl ether, or mixtures thereof.
9. A composition according to claims 6 to 8 wherein component (a) further comprises at least one liquid or solid alicyclic polyfunctional epoxide, oxetane or spiro-ortho ester compound having at least two cationically-reactive groups in the molecule, or mixtures thereof.
10. A composition according to claims 6 to 9 wherein component a1) is between 3 and 90%, preferably at least 15% by weight of component a3).
11. A composition according to claims 6 to 10 wherein component a3) has an epoxy functionality of at least 4, e.g. at least 4.5.
12. A composition according to claims 1 to 11 wherein the composition further comprises:
 - e) 0.5 to about 40 percent by weight of at least one solid or liquid cationic reactive modifier-flexibilizer.
13. A composition according to claim 12 wherein the at least one solid or liquid cationic reactive modifier is a reactive epoxy modifier or reactive vinyl ether modifier or mixtures thereof.
14. A composition according to claim 12 wherein the reactive modifier-flexibilizer comprises at least one cationically reactive bifunctional aliphatic, alicyclic or aromatic compound containing a chain extension segment connected to the cationic reactive group with a molecular weight of at least about 100 and not more than 2000.
15. A composition according to claims 1 to 14 wherein the composition contains 7 to 30%, preferably 8 to 20% by weight of a free radically curable component comprising at least 4% by weight one mono- or di(meth)acrylate and at least 4% by weight a poly(meth)acrylate having (meth)acrylate functionality greater than or equal to 3.
16. A method of producing a cured product, in which a composition according to claims 1 to 15 is treated with actinic radiation.
17. A method for producing three-dimensional shaped articles comprising:
 - a) treating a radiation-curable composition according to claims 1 to 15 with actinic radiation to form an at least partially cured layer on the surface of said composition within a surface region corresponding to a desired cross-sectional area of the three-dimensional article to be formed,
 - b) covering the at least partially cured layer produced in step a) with a new layer of said radiation-curable composition, and
 - c) repeating steps a) and b) until an article having the desired shape is formed, and optionally,
 - d) post-curing the resulting article at an elevated temperature for sufficient time to achieve a final article having a heat deflection temperature in excess of 110°C.

Patentansprüche

1. Flüssige Harzzusammensetzung, umfassend

(a) 55-90 Gewichtsprozent von mindestens einer festen oder flüssigen, durch aktinische Strahlung härtbaren und kationisch polymerisierbaren organischen Substanz, worin Komponente (a) umfasst

a1) mindestens einen Glycidylether eines mehrwertigen aliphatischen, alicyclischen oder aromatischen

Alkohols mit mindestens drei Epoxygruppen mit einem Epoxyäquivalentgewicht zwischen 90 und 800 g/Äquivalent und

a2) mindestens ein festes oder flüssiges alicyclisches Epoxid mit einem Epoxyäquivalentgewicht zwischen 80 und 330 mit mindestens zwei Epoxygruppen mit einer Monomerreinheit von mindestens etwa 80 Gewichtsprozent, oder Gemische davon,

(b) 0,05 bis 12 Gewichtsprozent eines für aktinische Strahlung empfindlichen Starters zur kationischen Polymerisation;

(c) 4 bis 35 Gewichtsprozent einer durch aktinische Strahlung härtbaren und radikalisch polymerisierbaren organischen Substanz;

(d) 0,02 bis 10 Gewichtsprozent eines für aktinische Strahlung empfindlichen Starters zur radikalischen Polymerisation und

(e) gegebenenfalls bis zu 40 Gewichtsprozent von mindestens einem festen oder flüssigen, kationischen, reaktiven Modifizierungsmittel-Flexibilisator,

wobei die Gesamtsumme von Komponenten (a) bis (e) 100 Gewichtsprozent ist.

2. Zusammensetzung nach Anspruch 1, worin Komponente (a) zwischen 20 und 75 Gewichtsprozent umfasst.

3. Zusammensetzung nach Ansprüchen 1 bis 2, worin Komponente (a) weiterhin nicht mehr als 20 Gewichtsprozent von mindestens einer flüssigen oder festen Vinyletherverbindung mit mindestens zwei kationisch reaktiven Gruppen in dem Molekül oder einen Hydroxy-funktionalisierten Mono(poly)-vinylether oder Gemische davon umfasst.

4. Zusammensetzung nach Ansprüchen 1 bis 3, worin Komponente (a) weiterhin mindestens eine/n flüssige/n oder feste/n Epoxycresolnovolak, Epoxyphenolnovolak, Oxetan- oder Spiro-ortho-esterverbindung mit mindestens zwei kationisch reaktiven Gruppen im Molekül oder Gemische davon umfasst.

5. Zusammensetzung nach Ansprüchen 1 bis 4, worin Komponente a1) zwischen 3 und 90%, vorzugsweise mindestens 15 Gewichtsprozent von Komponente a2), beträgt.

6. Flüssige Harzzusammensetzung, umfassend

(a) 55-90 Gewichtsprozent von mindestens einer festen oder flüssigen, durch aktinische Strahlung härtbaren und kationisch polymerisierbaren organischen Substanz, worin Komponente (a) umfasst

a1) mindestens einen Glycidylether eines mehrwertigen aliphatischen, alicyclischen oder aromatischen Alkohols mit mindestens drei Epoxygruppen mit einem Epoxyäquivalentgewicht zwischen 90 und 800 g/Äquivalent und

a3) mindestens einen festen oder flüssigen Epoxycresolnovolak oder Epoxyphenolnovolak mit einem Epoxyäquivalentgewicht zwischen 130 und 350 mit mindestens zwei funktionellen Gruppen, oder Gemische davon,

(b) 0,05 bis 12 Gewichtsprozent eines für aktinische Strahlung empfindlichen Starters zur kationischen Polymerisation;

(c) 4 bis 35 Gewichtsprozent einer durch aktinische Strahlung härtbaren und radikalisch polymerisierbaren organischen Substanz;

(d) 0,02 bis 10 Gewichtsprozent eines für aktinische Strahlung empfindlichen Starters zur radikalischen Polymerisation und

(e) gegebenenfalls bis zu 40 Gewichtsprozent von mindestens einem festen oder flüssigen, kationischen, reaktiven Modifizierungsmittel-Flexibilisator,

wobei die Gesamtsumme von Komponenten (a) bis (e) 100 Gewichtsprozent ist.

7. Zusammensetzung nach Anspruch 6, worin Komponente (a) zwischen 2 und 50 Gewichtsprozent Komponente a3) umfasst.

8. Zusammensetzung nach Ansprüchen 6 bis 7, worin Komponente (a) weiterhin nicht mehr als 20 Gewichtsprozent von mindestens einer flüssigen oder festen Vinyletherverbindung mit mindestens zwei kationisch reaktiven Gruppen

pen in dem Molekül, oder einem Hydroxy-funktionalisierten Mono(poly)-vinylether, oder Gemischen davon, umfasst.

- 5 9. Zusammensetzung nach Ansprüchen 6 bis 8, worin Komponente (a) weiterhin mindestens eine flüssige oder feste alicyclische polyfunktionelle Epoxid-, Oxetan- oder Spiro-orthoesterverbindung mit mindestens zwei kationisch reaktiven Gruppen im Molekül, oder Gemische davon, umfasst.
- 10 10. Zusammensetzung nach Ansprüchen 6 bis 9, worin Komponente a1) zwischen 3 und 90%, vorzugsweise mindestens 15 Gewichtsprozent, von Komponente a3) ist.
11. Zusammensetzung nach Ansprüchen 6 bis 10, worin Komponente a3) eine Epoxyfunktionalität von mindestens 4, beispielsweise mindestens 4,5, aufweist.
- 15 12. Zusammensetzung nach Ansprüchen 1 bis 11, worin die Zusammensetzung weiterhin umfasst:
(e) 0,5 bis etwa 40 Gewichtsprozent von mindestens einem festen oder flüssigen, kationischen, reaktiven Modifizierungsmittel-Flexibilisator.
- 20 13. Zusammensetzung nach Anspruch 12, worin mindestens ein festes oder flüssiges, kationisches, reaktives Modifizierungsmittel ein reaktives Epoxymodifizierungsmittel oder reaktives Vinylethermodifizierungsmittel oder Gemische davon ist.
- 25 14. Zusammensetzung nach Anspruch 12, worin der reaktive Modifizierungsmittel-Flexibilisator mindestens eine kationisch reaktive, bifunktionelle aliphatische, alicyclische oder aromatische Verbindung umfasst, die ein Kettenverlängerungssegment, verbunden mit der kationisch reaktiven Gruppe mit einem Molekulargewicht von mindestens etwa 100 und nicht mehr als 2000, umfasst.
- 30 15. Zusammensetzung nach Ansprüchen 1 bis 14, worin die Zusammensetzung 7 bis 30%, vorzugsweise 8 bis 20 Gewichtsprozent, einer durch freie Radikale härtbaren Komponente enthält, umfassend mindestens 4 Gewichtsprozent eines Monoo oder Di(meth)acrylats und mindestens 4 Gewichtsprozent eines Poly(meth)acrylats mit (Meth)acrylatfunktionalität größer als oder gleich 3.
- 35 16. Verfahren zur Herstellung eines gehärteten Produkts, bei dem eine Zusammensetzung gemäß Ansprüchen 1 bis 15 mit aktinischer Strahlung behandelt wird.
17. Verfahren zur Herstellung von dreidimensional geformten Gegenständen, umfassend:
 - a) Behandeln einer strahlungshärtbaren Zusammensetzung nach Ansprüchen 1 bis 15 mit aktinischer Strahlung, zur Bildung von mindestens einer teilweise gehärteten Schicht auf der Oberfläche der Zusammensetzenden dreidimensionalen Gegenstands,
 - b) Bedecken der in Schritt a) hergestellten, mindestens teilweise gehärteten Schicht mit einer neuen Schicht der strahlungshärtbaren Zusammensetzung und
 - 45 c) Wiederholen von Schritten a) und b), bis ein Gegenstand mit der gewünschten Form gebildet ist, und gegebenenfalls
 - d) Nachhärten des erhaltenen Gegenstands bei einer erhöhten Temperatur für einen ausreichenden Zeitraum zum Erreichen eines fertigen Gegenstands mit einer Wärmedurchbiegungstemperatur oberhalb 110°C.

50 Revendications

1. Composition de résine liquide comprenant

55 (a) 55 à 90 % en poids d'au moins une substance organique solide ou liquide, durcissable par irradiation actinique et cationiquement polymérisable, le composant (a) comprenant

a1) au moins un éther glycidique d'un polyol aliphatique, alicyclique ou aromatique ayant au moins trois groupes époxy avec un poids équivalent d'époxy compris entre 90 et 800 g/équivalent et

a2) au moins un époxyde alicyclique solide ou liquide ayant un poids équivalent d'époxy compris entre 80 et 330 ayant au moins deux groupes époxy avec une pureté de monomère d'au moins environ 80 % en poids, ou des mélanges de tels époxydes,

- (b) 0,05 à 12 % en poids d'un initiateur de polymérisation cationique sensible à un rayonnement actinique ;
- (c) 4 à 35 % en poids d'une substance organique durcissable par irradiation actinique et polymérisable par voie radicalaire ;
- (d) 0,02 à 10 % en poids d'un initiateur de polymérisation radicalaire sensible à un rayonnement actinique ; et
- (e) facultativement jusqu'à 40 % en poids d'au moins un modificateur-assouplisseur réactif cationique, solide ou liquide,

le total des composants (a) à (e) étant de 100 pour cent en poids.

2. Composition selon la revendication 1, dans laquelle le composant (a) représente entre 20 et 75 % en poids.

3. Composition selon les revendications 1 et 2, dans laquelle le composant (a) comprend en outre un maximum de 20 % en poids d'au moins un éther vinylique liquide ou solide ayant au moins deux groupes cationiquement réactifs dans la molécule ou un éther mono(poly)vinylique hydroxylé, ou des mélanges d'entre eux.

4. Composition selon les revendications 1 à 3, dans laquelle le composant (a) comprend en outre au moins une novolaque époxy-crésol, une novolaque époxy-phénol, un oxétanne ou un spiro-ortho-ester ayant au moins deux groupes cationiquement réactifs dans la molécule, liquide ou solide, ou des mélanges d'entre eux.

5. Composition selon les revendications 1 à 4, dans laquelle le composant a1) représente 3 à 90 %, de préférence au moins 15 %, en poids du composant a2).

6. Composition de résine liquide comprenant

(a) 55 à 90 % en poids d'au moins une substance organique solide ou liquide, durcissable par irradiation actinique et cationiquement polymérisable, le composant (a) comprenant

a1) au moins un éther glycidyle d'un polyol aliphatique, alicyclique ou aromatique ayant au moins trois groupes époxy avec un poids équivalent d'époxy compris entre 90 et 800 g/équivalent et

a3) au moins une novolaque époxy-crésol ou novolaque époxy-phénol solide ou liquide avec un poids équivalent d'époxy compris entre 130 et 350, ayant au moins deux groupes fonctionnels, ou des mélanges de telles novolaques,

- (b) 0,05 à 12 % en poids d'un initiateur de polymérisation cationique sensible à un rayonnement actinique ;
- (c) 4 à 35 % en poids d'une substance organique durcissable par irradiation actinique et polymérisable voie radicalaire ;

- (d) 0,02 à 10 % en poids d'un initiateur de polymérisation radicalaire sensible à un rayonnement actinique ; et
- (e) facultativement jusqu'à 40 % en poids d'au moins un modificateur-assouplisseur réactif cationique, solide ou liquide,

le total des composants (a) à (e) étant de 100 pour cent en poids.

7. Composition selon la revendication 6, dans laquelle le composant (a) comprend 2 à 50 % en poids du composant a3).

8. Composition selon les revendications 6 et 7, dans laquelle le composant (a) comprend en outre un maximum de 20 % en poids d'au moins un éther vinylique liquide ou solide ayant au moins deux groupes cationiquement réactifs dans la molécule ou un éther mono(poly)vinylique hydroxylé, ou des mélanges d'entre eux.

9. Composition selon les revendications 6 à 8, dans laquelle le composant (a) comprend en outre au moins un époxy- de polyfonctionnel alicyclique, un oxétanne ou un spiro-ortho-ester ayant au moins deux groupes cationiquement réactifs dans la molécule, liquide ou solide, ou des mélanges d'entre eux.

10. Composition selon les revendications 6 à 9, dans laquelle le composant a1) représente 3 à 90 %, de préférence

au moins 15 % en poids, du composant a3).

11. Composition selon les revendications 6 à 10, dans laquelle le composant a3) a une fonctionnalité époxy d'au moins 4, par exemple d'au moins 4,5.

12. Composition selon les revendications 1 à 11, dans laquelle la composition contient de plus :

(e) 0,5 à environ 40 pour cent en poids d'au moins un modificateur-assouplisseur réactif cationique solide ou liquide.

13. Composition selon la revendication 12, dans laquelle ledit au moins un modificateur réactif cationique solide ou liquide est un modificateur époxy réactif ou un modificateur éther vinylique réactif, ou un mélange de tels modificateurs.

14. Composition selon la revendication 12, dans laquelle le modificateur-assouplisseur réactif comprend au moins un composé aliphatique, alicyclique ou aromatique bifonctionnel cationiquement réactif contenant un segment d'allongement de chaîne relié au groupe réactif cationique ayant un poids moléculaire d'au moins environ 100 et d'au plus 2000.

15. Composition selon les revendications 1 à 14, dans laquelle la composition contient 7 à 30 %, de préférence 8 à 20 % en poids d'un composant durcissable par voie radicalaire comprenant au moins 4 % en poids d'un mono- ou di(méth)acrylate et au moins 4 % en poids d'un poly(méth)-acrylate ayant une fonctionnalité (méth)acrylate supérieure ou égale à 3.

16. Procédé de production d'un produit durci, dans lequel une composition selon les revendications 1 à 15 est traitée par irradiation actinique.

17. Procédé de production d'articles façonnés tridimensionnels, comprenant les étapes suivantes :

- a) traiter une composition durcissable par irradiation selon les revendications 1 à 15 par irradiation actinique pour former une couche au moins partiellement durcie sur la surface de ladite composition dans une région de surface correspondant à une section transversale souhaitée de l'article tridimensionnel à former,
- b) couvrir ladite couche au moins partiellement durcie produite dans l'étape a) avec une nouvelle couche de ladite composition durcissable par irradiation, et
- c) répéter les étapes a) et b) jusqu'à ce qu'un article ayant la forme souhaitée soit formé, et facultativement,
- d) soumettre l'article résultant à un post-durcissement à température élevée pendant un temps suffisant pour obtenir un article final ayant une température de fléchissement sous charge supérieure à 110°C.